


-  Sun-Like Full Spectrum
-  Dimmable Ballast
-  Uniform Light Distribution



Specifications

Input Voltage: 220-240 Volt AC
Rated Power: 120W±5%
Current Consumption: 0.5A-0.54A at 120W
Power factor: 0,98
LED: LEDESTAR
PPF Efficacy: 2.7 umol/J
BTU: 408
IP Rating: IP44
Product dimensions (LxWxH): 360*340*60mm
Package dimensions (LxWxH): 380*350*65mm
Gross Weight: 2.4kg
Operating Temperature: -25-40°C
Housing Material: Aluminum
Lifetime: 50,000H
Warranty: 2 Years

Spectrum

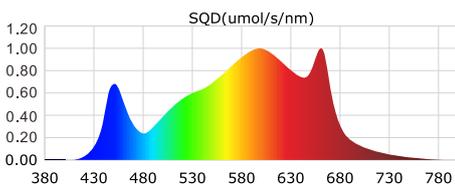

 3500K
 660nm

Maximize plant growth and quality

This powerful, full-spectrum light source is intended for full-erplant growth from the vegetative stages to higher-light-requiring bloom and finishing stages.

PAR Distribution

Height of 30cm

30	41	55	54	40	29
38	85	178	179	81	39
49	169	578	553	166	52
48	166	574	554	162	53
37	82	178	175	80	38
28	40	53	53	39	31

120CM

Height of 60cm

55	60	85	83	65	53
63	104	144	145	106	65
87	146	211	207	142	85
85	141	209	210	139	83
64	105	141	143	103	62
56	67	83	82	65	55

120CM

Height of 90cm

71	74	92	93	76	71
74	92	109	111	96	75
80	111	125	127	108	81
79	109	126	125	106	80
73	94	113	109	95	73
72	75	92	90	74	69

120CM