


-  Sun-Like Full Spectrum
-  Dimmable Ballast
-  Uniform Light Distribution

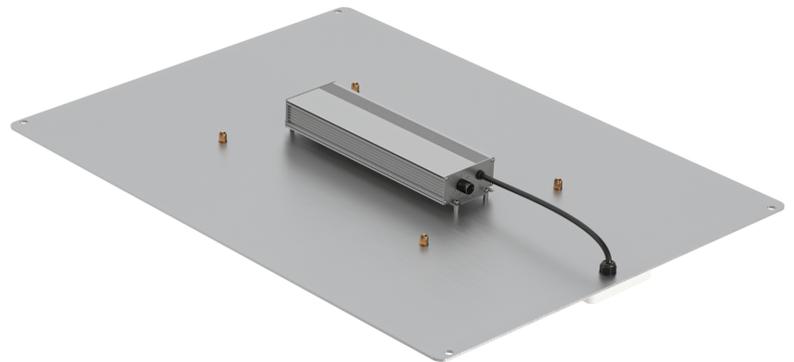

Specifications

Input Voltage: 220-240 Volt AC

Rated Power: 240W±5%

Current Consumption: 1.0-1.1A at 240W

Power factor: 0,98

LED: LEDESTAR

PPF Efficacy: 2.7 umol/J

BTU: 816

IP Rating: IP44

Product dimensions (LxWxH): 600*450*60mm

Package dimensions (LxWxH): 620*460*65mm

Gross Weight: 2.8kg


Operating Temperature: -25-40°C

Housing Material: Aluminum

Lifetime: 50,000H

Warranty: 2 Years

Spectrum

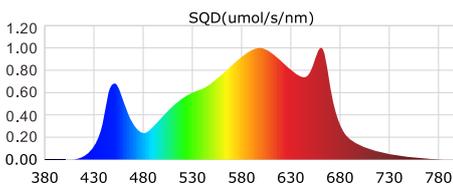

 3500K  660nm

Maximize plant growth and quality

This powerful, full-spectrum light source is intended for full-erplant growth from the vegetative stages to higher-light-requiring bloom and finishing stages.

PAR Distribution

Height of 30cm

64	81	120	119	80	63
81	184	382	383	182	82
103	327	855	864	323	100
100	324	860	863	320	102
80	179	386	382	179	79
61	80	118	117	82	63

120CM

Height of 60cm

114	140	173	170	137	114
129	203	275	271	199	132
157	264	374	370	263	155
158	260	369	373	260	154
131	199	277	275	201	129
111	139	169	171	135	110

120CM

Height of 90cm

136	155	173	170	151	132
152	188	209	201	182	150
162	205	233	229	205	160
160	203	231	232	201	161
149	184	206	203	185	148
134	152	171	171	148	130

120CM