

- **Manual Dimmer**
0-10V Control Port
Input 220-240V AC
- **Built-in driver**
Durable and reliable power source, all in one design.
- **PC Cover**
Protect the fixture chips from the influence of growing environment



Specifications

Input Voltage: 220-240 Volt AC

Rated Power: 360W±5%

Current Consumption: 1.5A-1.6A at 360W

Power factor: 0,98

LED: LEDESTAR

PPF Efficacy: 2.7 $\mu\text{mol/J}$

BTU: 1224

IP Rating: IP44

Product dimensions (LxWxH): 1100*580*38mm

Package dimensions (LxWxH): 1145*55*600mm

Gross Weight: 5kg

Operating Temperature: -25-40°C

Control: Manual Dimming System, Compatible with Ralight Controller

External Dim: Yes with Ralight Controller


External Dim Connector RJ14 Connector Build in 2x

Housing Material: Aluminum

Lifetime: 50,000H

Warranty: 2 Years

Spectrum

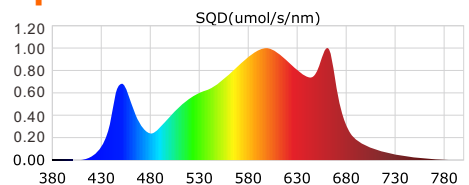

PAR Distribution

Height of 30cm

65	179	267	264	171	64
124	415	653	656	398	114
147	534	808	804	498	146
143	524	779	773	477	138
120	415	635	619	385	108
64	175	262	259	165	63

120CM

Height of 60cm

103	172	226	223	169	102
156	263	358	358	260	147
182	331	440	435	322	181
182	329	438	432	322	178
156	271	361	355	262	148
104	172	225	223	169	102

120CM

Height of 90cm

103	141	168	167	139	102
135	184	224	224	183	130
150	217	260	259	215	152
150	217	260	258	215	151
133	188	225	222	186	132
102	138	165	164	138	102

120CM